


Omada Gigabit VPN Router

MODEL: ER7206 (TL-ER7206)

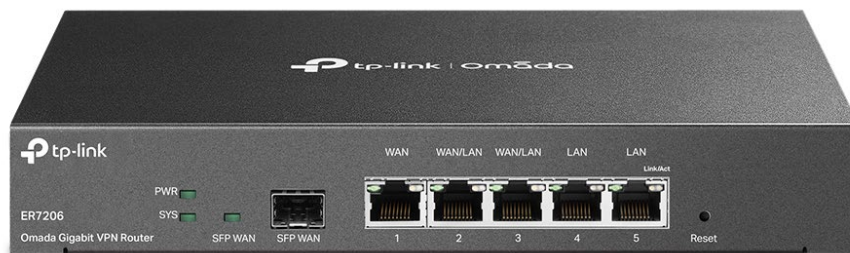

Highlights

- 64-bit dedicated dual-core processor and 512MB DDR3 high-speed memory for outstanding performance
- Equipped with 1 Gigabit SFP WAN port, 1 Gigabit RJ45 WAN port, 2 Gigabit RJ45 WAN/LAN ports and 2 Gigabit LAN ports
- Supports multiple VPN protocols including OpenVPN/ IPSec/ PPTP/ L2TP/ L2TP over IPSec, helping users to establish VPN connections more flexibly
- Supports up to 100 IPsec VPN tunnels with VPN engine
- Captive portal provides a convenient method for guest authentication
- Abundant features including load balance, bandwidth control and access control
- Professional 4 kV lightning protection keeps your investments as safe as possible

Omada Solution



Hospitality

High Quality and Full Coverage Wi-Fi



Education

High-Density Wi-Fi



Retail

Social Marketing for O2O



Office

Wireless and Wired Connections




Catering

Full Wi-Fi Coverage in High-Density Environment

Software Defined Networking (SDN) with Cloud Access

Omada Software Defined Networking (SDN) platform integrates network devices, including access points, switches and gateways, providing 100% centralized cloud management. Omada creates a highly scalable network—all controlled from a single interface. Seamless wireless and wired connections are provided, ideal for use in hospitality, education, retail, offices, and more.

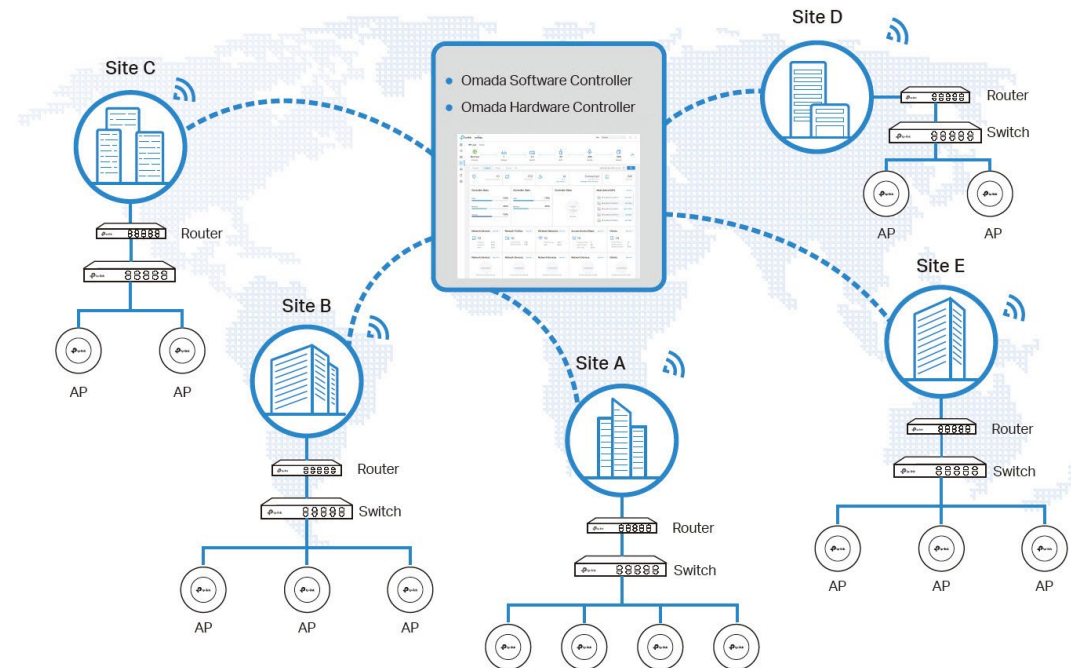

Hassle-Free Centralized Cloud Management


100% centralized cloud management of the whole network from different sites—all controlled from a single interface anywhere, anytime.



- ✓ No additional training needed
- ✓ Unlimited scalability
- ✓ Batch management
- ✓ Devices still work even when not connected to the Cloud


Assign Different Management Roles

Multi-user privilege assignment is available to increase management efficiency and security. Multi-person management, multi-level permissions, and the ability to add admins as needed, enable flexible network operation and maintenance.

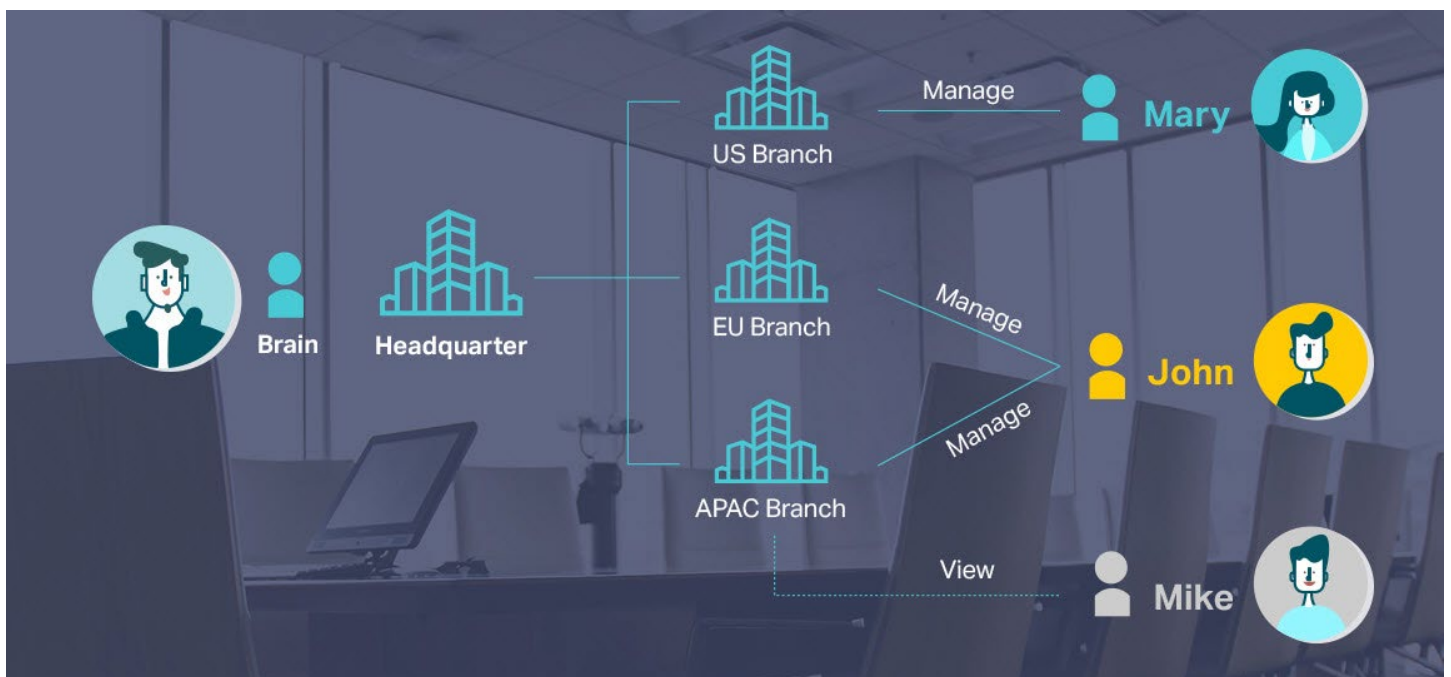


Easy and Intelligent Network Monitoring

The easy-to-use dashboard makes it easy to see your real-time network status; check network usage and traffic distribution; receive network condition logs, abnormal event warnings, and notifications; or even track key data for better business results. Network topology helps IP admins quickly see and troubleshoot connection at a glance.

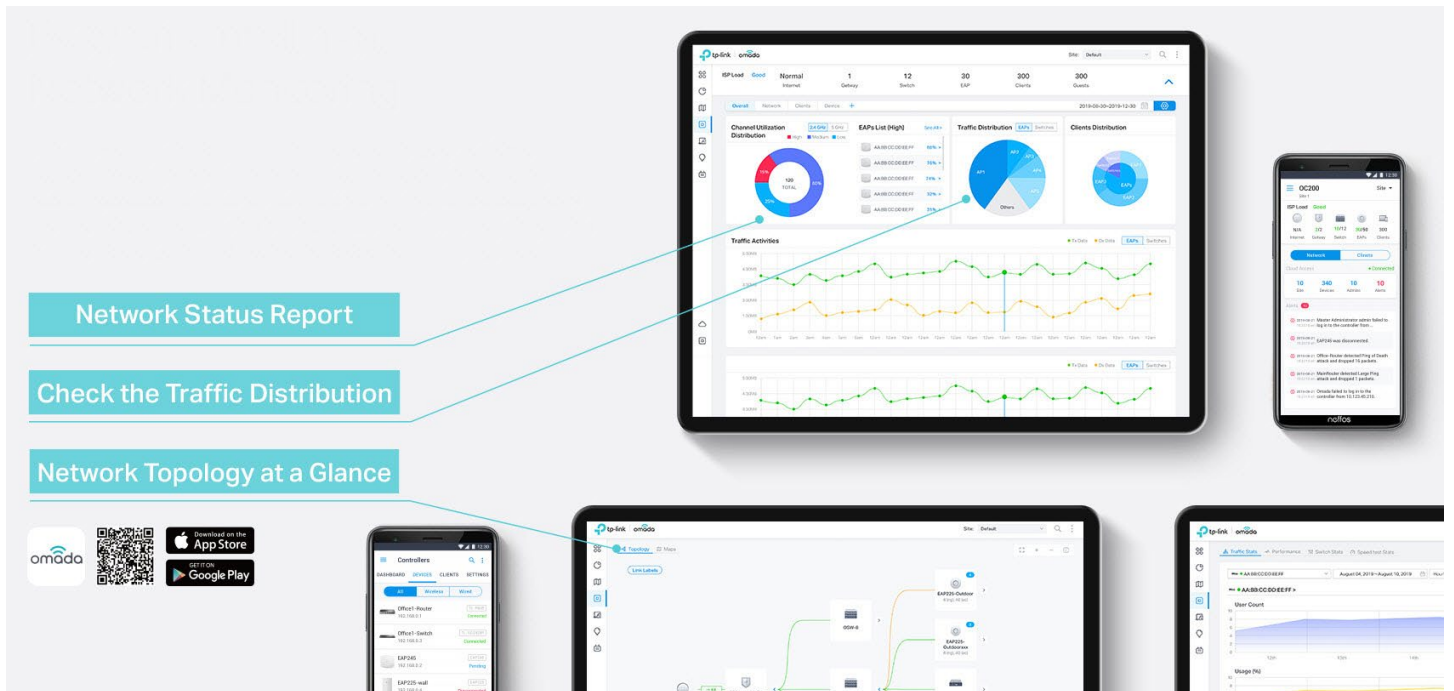

Comprehensive Protection for the Whole Network

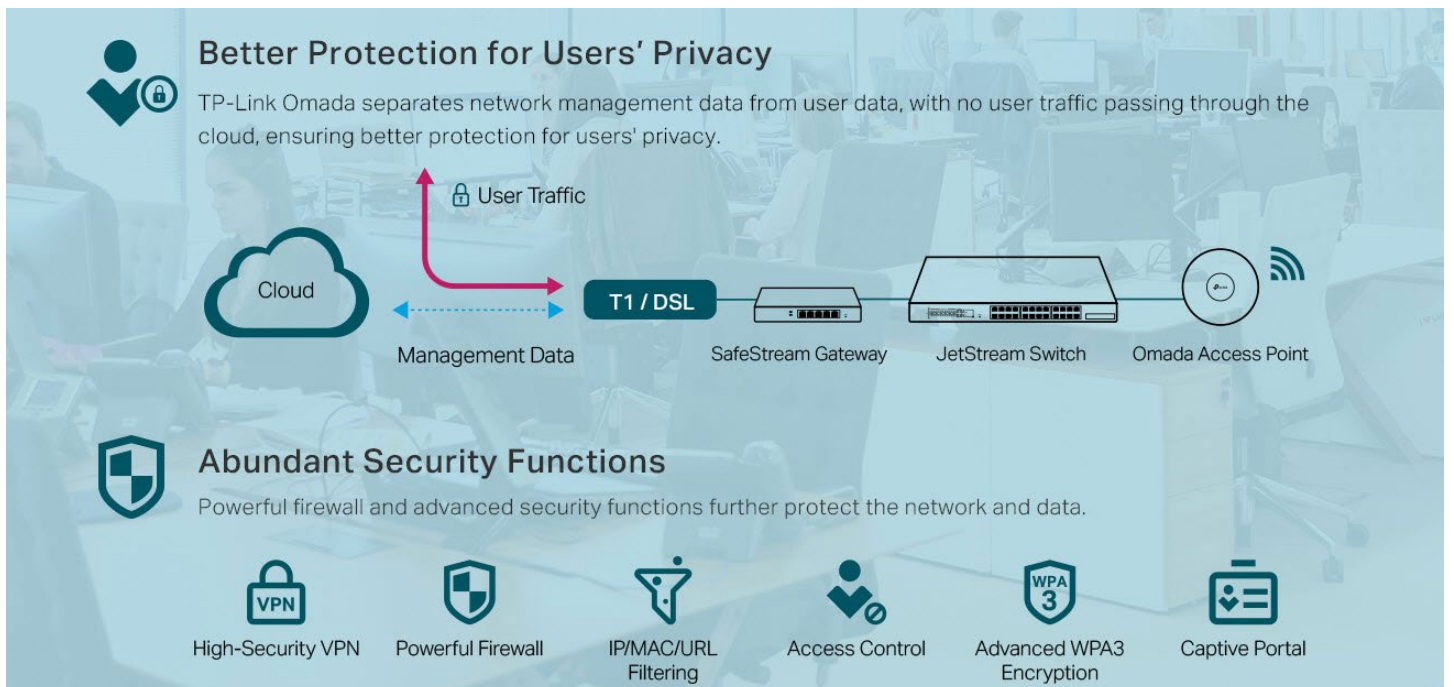

Product Features

Superior Hardware

With a 64-bit dual-core network processor and 512MB DDR3 memory, ER7206 (TL-ER7206) is able to handle multiple tasks while maintaining excellent performance and greater reliability.


Intelligent Bandwidth Allocation

The ER7206 (TL-ER7206) features 1 SFP WAN port, 1 Gigabit WAN port, and 2 WAN/LAN ports, allowing one device to meet multiple requirements. Intelligent Load Balancing distributes data streams according to the bandwidth proportion of each WAN port to make the most of multi-line broadband. IP-based Bandwidth Control and Session Limit functions give network administrators the power to flexibly manage how their bandwidth is used.

Peace of Mind Whatever the Weather

Professional-standard lightning protection prevents electrical surges from penetrating your network equipment, instead discharging them harmlessly into the Earth. Designed to withstand 4 kV of electricity when well-grounded, this router ensures your network investments remain as safe as possible from the wrath of Mother Nature.

Specifications

Model		ER7206 (TL-ER7206)
Product Picture		
Product Description		Omada Gigabit VPN Router
Hardware	Standards and Protocols	IEEE 802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE 802.3x, IEEE 802.1q, TCP/IP, DHCP, ICMP, NAT, PPPoE, NTP, HTTP, HTTPS, DNS, IPSec, PPTP, L2TP, SNMP
	Interface	1 Gigabit SFP Port 1 Gigabit WAN port 2 Gigabit LAN/WAN ports 2 Gigabit LAN port
	Network Media	10BASE-T: UTP category 3, 4, 5 cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 100BASE-TX: UTP category 5, 5e cable (Max 100 m) EIA/TIA-568 100Ω STP (Max 100 m) 1000BASE-T: UTP category 5, 5e, 6 cable (Max 100 m)
	Button	Reset button
	Power Supply	100–240 VAC, 50/60 Hz
	Flash	4MB SPI + 128 MB NAND
	DRAM	512 MB
	LED	PWR, SYS, SFP WAN, WAN (Speed, Link/Act), LAN (Speed, Link/Act)
	Surge Protection	4 kV surge protection
	Dimensions (W x D x H)	8.9 × 5.2 × 1.4 in (226 × 131 × 35 mm)

Model		ER7206 (TL-ER7206)
SDN Support	Hardware Controller (OC200/OC300)	Automatic Device Discovery Intelligent Network Monitoring Abnormal Event Warnings Unified Configuration
	Software Controller	Reboot Schedule Captive Portal Configuration
Performance	Concurrent Session	150,000
	New Sessions /Second	5,500
	Static IP NAT Throughput (Upload / Download)	940.3 Mbps / 940.2 Mbps
	DHCP NAT Throughput (Upload / Download)	940.3 Mbps / 940.4 Mbps
	PPPoE NAT Throughput (Upload / Download)	939.7 Mbps / 937.9 Mbps
	L2TP NAT Throughput (Upload / Download)	918.0 Mbps / 917.9 Mbps
	PPTP NAT Throughput (Upload / Download)	918.9 Mbps / 914.7 Mbps
	66 Byte Packet forwarding rate (Upload / Download)	486,918 pps / 488,372 pps
	1,518 Byte Packet forwarding rate (Upload / Download)	81,274 pps / 81,274 pps
	IPSec VPN Throughput (AES256)	291.6 Mbps
	L2TP VPN Throughput	Unencrypted: 1360.3 Mbps Encrypted: 202.3 Mbps
	PPTP VPN Throughput	Unencrypted: 1379.3 Mbps Encrypted: 115.6 Mbps
Basic Functions	WAN Connection Type	Static IP Dynamic IP PPPoE PPTP L2TP
	DHCP	DHCP Server DHCP Address Reservation Multi-IP Interfaces ¹ Multi-Net DHCP ¹
	MAC Clone	Modify WAN/LAN MAC Address ²
	IPTV	IGMP v2/v3 Proxy
	IPv6	Developing ³
	VLAN	802.1Q VLAN

1. Multi-IP Interfaces and Multi-Net DHCP are supported only in Controller Mode.
2. LAN MAC Address can be modified only in Standalone Mode.
3. IPv6 is being developed and will be updated in the following software versions.

Model		ER7206 (TL-ER7206)
Transmission	Load Balance	Intelligent Load Balance Application Optimized Routing Link Backup (Timing ¹ , Failover) Online Detection
	NAT	One-to-One NAT ² Multi-Net NAT Virtual Server Port Triggering ² NAT-DMZ FTP/H.323/SIP/IPSec/PPTP ALG, UPnP
	Routing	Static Routing Policy Routing
	Session Limit	IP-based Session Limit
	Bandwidth Control	IP-based Bandwidth Control
VPN	IPSec VPN	100 IPSec VPN Tunnels LAN-to-LAN, Client-to-LAN Main, Aggressive Negotiation Mode DES, 3DES, AES128, AES192, AES256 Encryption Algorithm IKE v1/v2 ³ MD5, SHA1 Authentication Algorithm NAT Traversal (NAT-T) Dead Peer Detection (DPD) Perfect Forward Secrecy (PFS)
	PPTP VPN	PPTP VPN Server PPTP VPN Client (10) ⁴ 50 Tunnels PPTP with MPPE Encryption
	L2TP VPN	L2TP VPN Server L2TP VPN Client (10) ⁴ 50 Tunnels L2TP over IPSec
	OpenVPN ⁵	OpenVPN Server OpenVPN Client (10) ⁴ 50 OpenVPN Tunnels
Security	Attack Defense	TCP/UDP/ICMP Flood Defense Block TCP Scan (Stealth FIN/Xmas/Null) Block Ping from WAN
	Filtering	Web Group Filtering ⁶ URL Filtering Web Security ⁶
	ARP Inspection ⁷	Sending GARP Packets ARP Scanning IP-MAC Binding
	Access Control	Source/Destination IP Based Access Control

1. The Timing mode in Link Backup is supported only in Standalone Mode.
2. One-to-One NAT and Port Triggering are only supported only in Standalone Mode.
3. IKE v2 is supported only in Controller Mode.
4. ER7206 can work as a VPN client and can connect with up to 10 VPN servers.
5. OpenVPN is supported only in Controller Mode.
6. Web Group Filtering and Web Security are only supported only in Standalone Mode.
7. ARP Inspection is supported only in Standalone Mode.

Model		ER7206 (TL-ER7206)
Authentication	Web Authentication	No Authentication Simple Password ¹ Hotspot (Local User / Voucher ¹ / SMS ¹ / Radius ¹) External Radius Sever External Portal Sever ¹ Facebook ¹
Management	Service	Dynamic DNS (Dyndns, No-IP, Peanuthull, Comexe)
	Maintenance	Web Management Interface Remote Management Export & Import Configuration SNMP v1/v2c/v3 ² Diagnostics (Ping & Traceroute) ³ NTP Synchronize ³ Syslog Support
Others	Certification	CE, FCC, RoHS
	Package Contents	ER7206 (TL-ER7206), Power Cord, Quick Installation Guide
	System Requirements	Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7/8/8.1/10 MAC OS, NetWare, UNIX or Linux
	Environment	Operating Temperature: 0 °C to 40 °C (32 °F to 104 °F) Storage Temperature: -40 °C to 70 °C (-40 °F to 158 °F) Operating Humidity: 10% to 90% non-condensing Storage Humidity: 5% to 90% non-condensing

1. The following web authentication methods are supported only in Controller Mode: Simple Password, Voucher, SMS, Radius, External Portal Sever, and Facebook.
2. SNMP v3 is supported only in Controller Mode.
3. Diagnostics (Ping & Traceroute) and NTP Synchronize are supported only in Standalone Mode

Ordering Information

Host Router

Model	Description
ER7206 (TL-ER7206)	Omada Gigabit VPN Router

SFP Modules

Model	Description
TL-SM311LS	Gigabit SFP module, Single-mode, LC interface, Up to 20km distance
TL-SM311LM	Gigabit SFP module, Multi-mode, LC interface, Up to 550m distance
TL-SM321A	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 20 km
TL-SM321A-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1550 nm/RX: 1310 nm, 2 km
TL-SM321B	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 20 km
TL-SM321B-2	Gigabit WDM Bi-Directional SFP Module, single-mode, LC connector, TX: 1310 nm/RX: 1550 nm, 2 km

* Some models featured in this guide may be unavailable in your country or region. Visit TP-Link website for local sales information: www.tp-link.com.

* Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. © 2021 TP-Link